



Easy to Use

- Quick plug-and-play installation
- Graphic visualization of current measured values in Sunny Portal and local web UI

Flexible

- Space-saving, top-hat rail mounting in household distribution thanks to compact enclosure
- Flexible use in applications > 63 A thanks to external current transformers

- Suitable for universal use regardless of existing energy meter

High Performance


- Fast three-phase, bidirectional reading for effective energy management*
- Ideal coordination with SMA devices to ensure control tasks are carried out stably

SMA ENERGY METER

Universal recording of measured values for intelligent energy management

A high-performance measurement solution for intelligent energy management in PV systems with SMA devices. The SMA Energy Meter calculates phase-exact and balanced electrical measured values and communicates these via Ethernet in the local network. In this way, all data on grid feed-in and purchased electricity as well as PV generation by other PV inverters can be communicated to SMA systems frequently and with a high level of precision.

Integrating the SMA Energy Meter establishes, in all systems, an ideally coordinated system configuration that guarantees the highest performance and stability with the best cost savings and increased self-consumption.

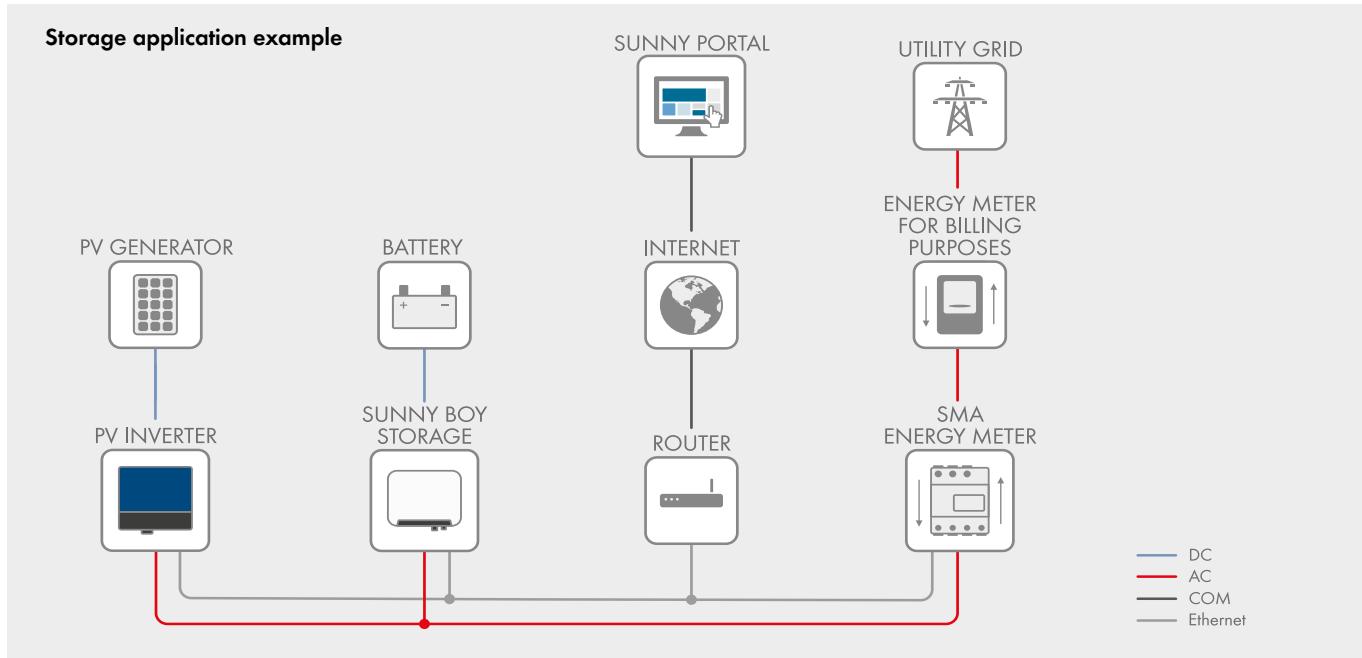

Technical Data		SMA Energy Meter
Communication		
Connection to the local router		via Ethernet cable (10/100 Mbit/s, RJ45 plug)
Inputs (voltage and current)		
Nominal voltage		230 V/400 V
Frequency		50 Hz/±5%
Nominal current / limiting current per line conductor		5 A/63 A (>63 A can be connected via external current transformers)
Start-up current		< 25 mA
Connection cross-section		10 mm ² to 16 mm ² ¹⁾ (for 63 A fusing)
Torque for screw terminals		2.0 Nm
Ambient Conditions in Operation		
Ambient temperature		-25 °C to +40 °C
Storage temperature range		-25 °C to +70 °C
Protection class (according to IEC 62103)		II
Degree of protection (according to IEC 60529)		IP2X
Max. permissible value for relative humidity (non-condensing)		5% to 90% ²⁾
Elevation above MSL		0 m to 2000 m
General Data		
Dimensions (W/H/D)		70 mm/88 mm/65 mm
Top hat-rail width units		4
Weight		0.3 kg
Mounting location		Switch or meter cabinet
Mounting type		Top-hat rail mounting
Status display		2 LEDs
Self-consumption		< 3 W
Measurement accuracy, measuring cycle		1%, 1000 ms
Features		
Warranty		2 years
Certificates and permits (more available upon request)		www.SMA-Solar.com
Last updated: January 2019		
1) Mechanical 1.5 mm ² to 25 mm ²		
2) 95% only on up to 30 days of the year		
Type designation	EMETER-20	